




# Canon PowerShot G11 Rear Dial Replacement

This guide will begin after the rear cover replacement guide. Afterwards it will go through the steps to remove the rear dial.

Written By: Dustin Brinegar

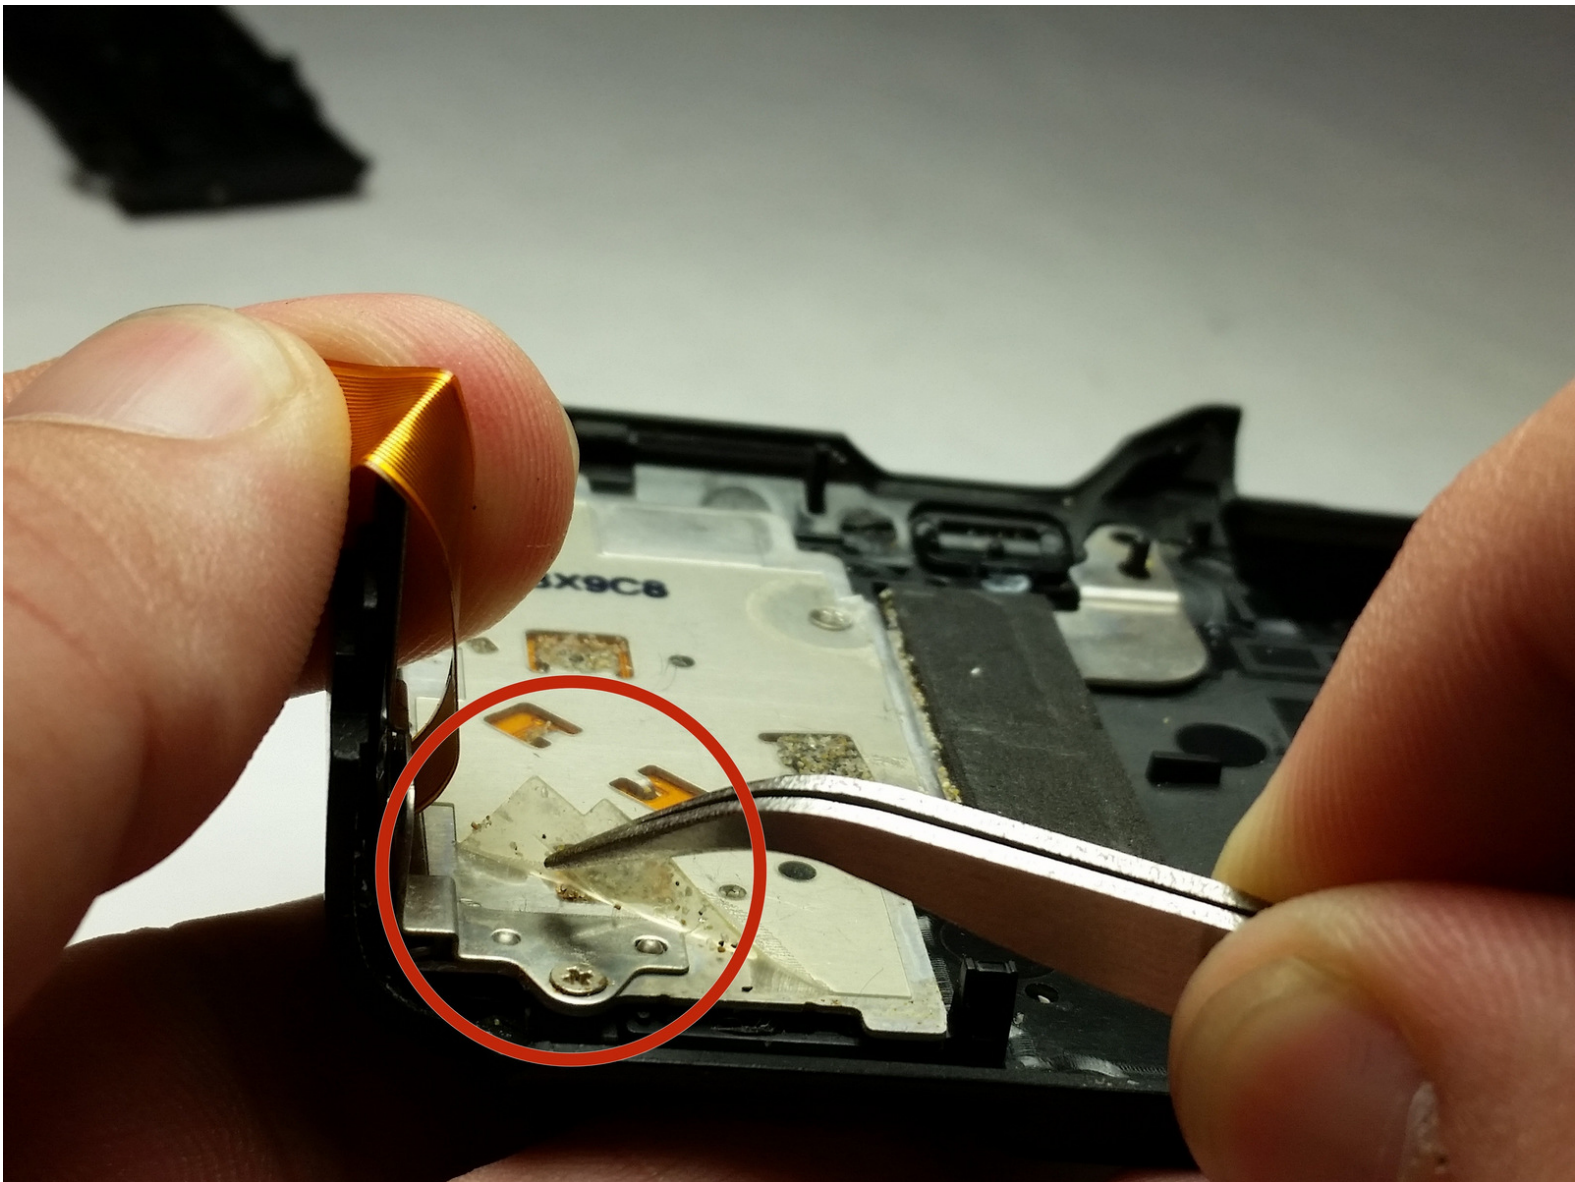



## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Rear Cover



- Remove the three screws on the bottom of the camera using the 00 sized phillips head screw driver.

## Step 2



- Remove the four screws on the left side of the camera.



### Step 3



- Remove the screw on the right side of the camera.

### Step 4



- Open up the HDMI port on the right side of the camera. Then remove the screw in the HDMI port.

## Step 5



- Remove the screw to the right of the view finder on the rear of the camera.


## Step 6




- Use the spudger to crack open the case.




## Step 7

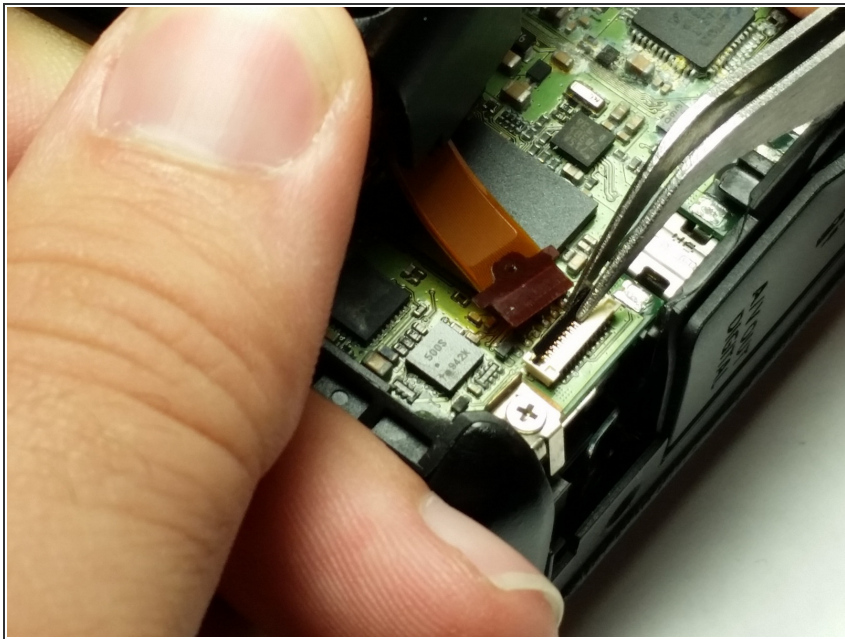


 The rear case is still attached to the camera with a ribbon cable. The socket has a flip up lid that must be flipped up before the cable can be removed. Use the tweezers to flip the cable attachment up.

## Step 8

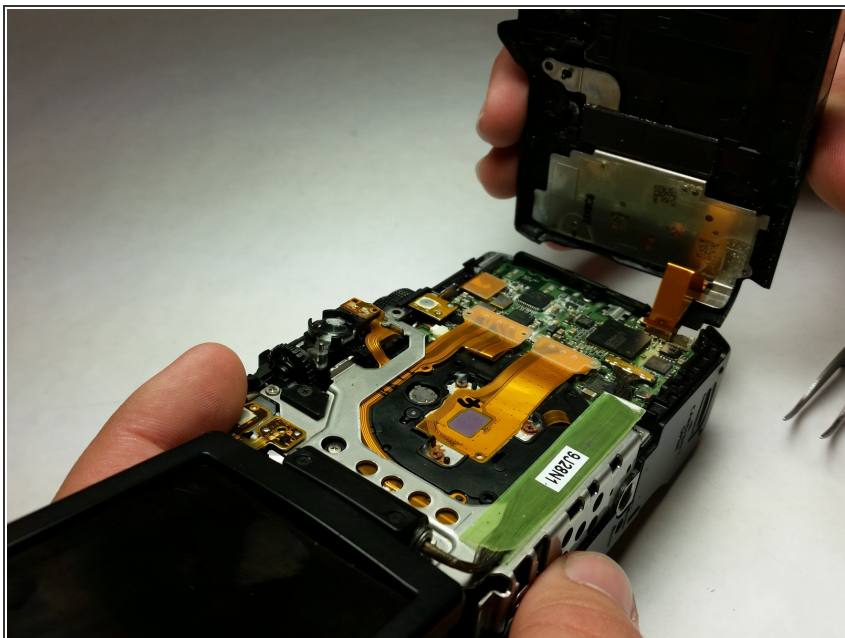


- The rear cover is now unattached from the camera.

## Step 9 — Rear Dial

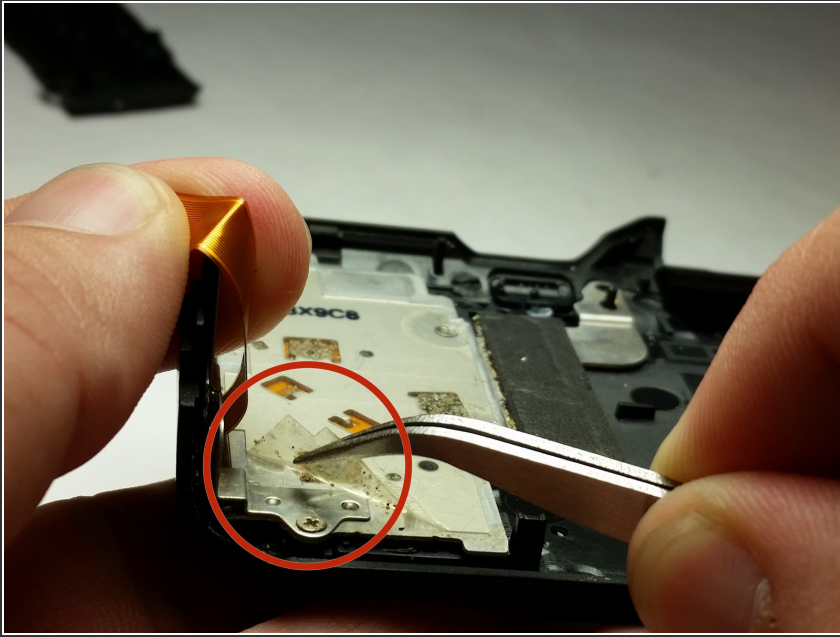

- Remove the plastic covering of the left side of the rear case interior.



## Step 10

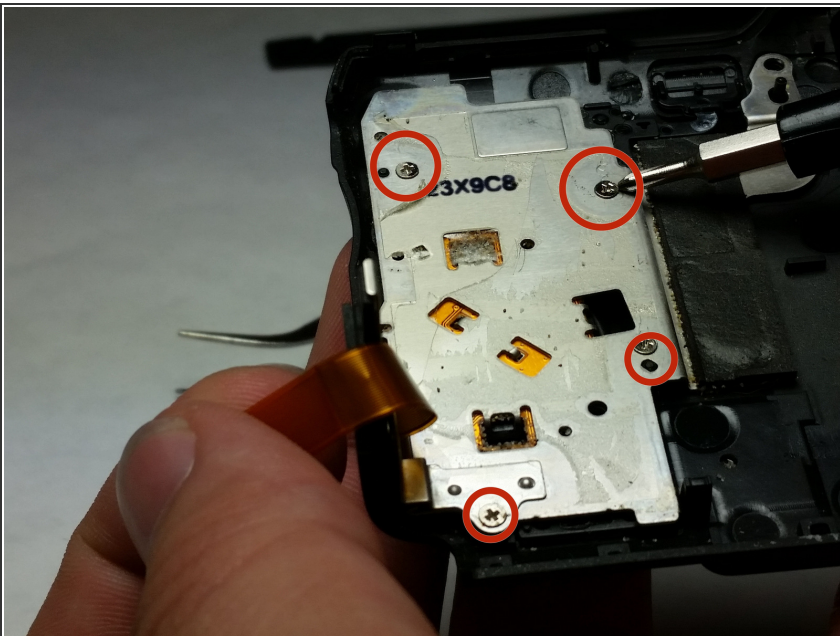

- Remove the four screws that are now accessible with the removal of the plastic covering them.



## Step 11

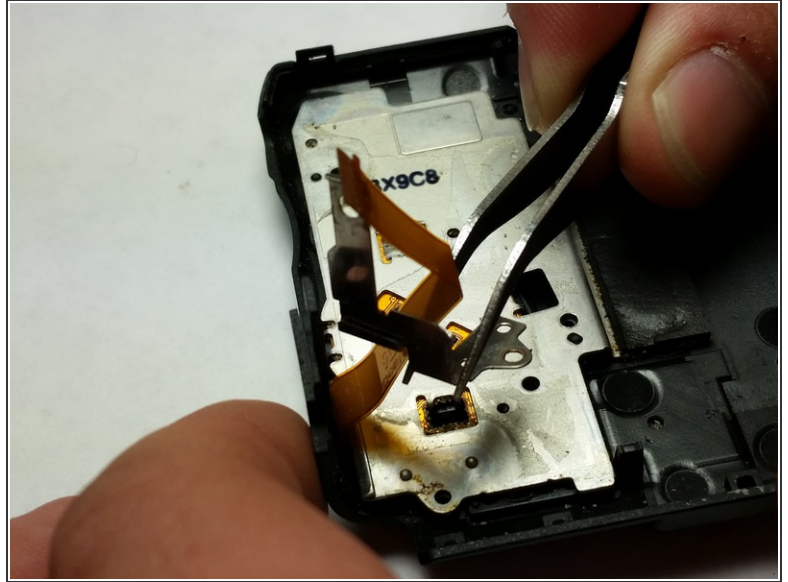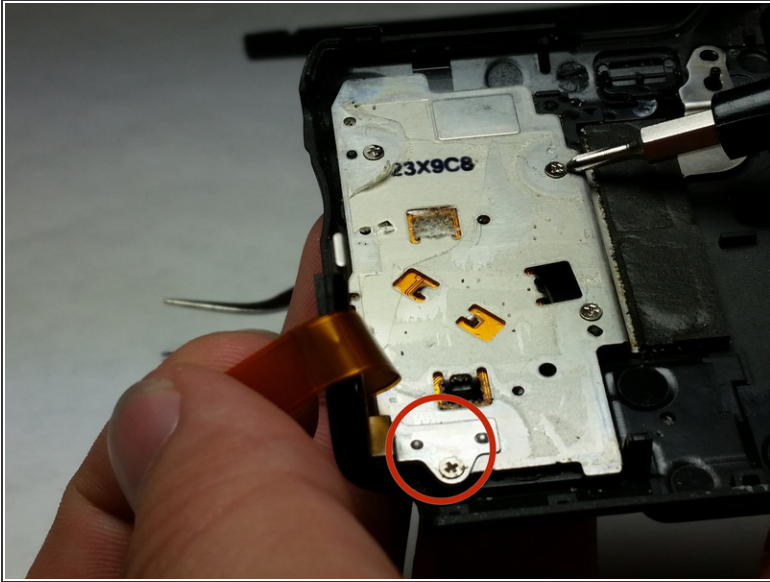

- After the screws are removed, pull the metal bracket out of the camera.


## Step 12



- Push the dial out from the other side of the cover.



## Step 13

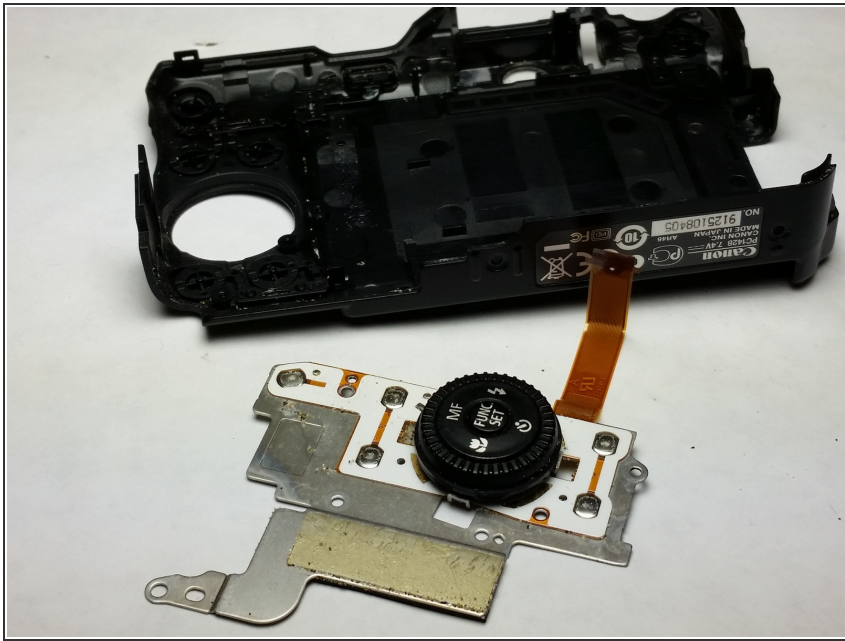

- Remove the dial from the case completely.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 03:55:33 AM.